


AluBREAK-COMM 10755CG Frame.




The 10755CG Commercial Frame is our most versatile system in the AluBREAK Range, engineered with low polyamide thermal breaks to deliver superior energy performance. Designed to adapt across multiple applications, it can be configured as a Fixed or Awning Window, Sliding Door, and an Open-In or Open-Out Hinge Door, offering complete design flexibility for premium residential and commercial projects.



AluBREAK-COMM Open-Out Hinged Door



AluBREAK-COMM Sliding Door

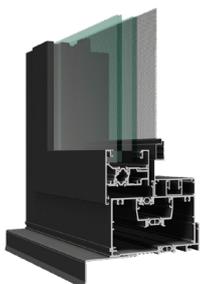

AluBREAK-COMM Awning Window

Features & Benefits

- Large size capability allows for expansive openings, meeting modern architectural design requirements and maximising natural light
- Utilities common parts as a nesting system
- Optional fly door available for added security and protection
- Frame adapters can be used to suit residential projects, enabling seamless integration across different build types
- Uses a dual seal overlapping sash creating superior airtightness

Maximum Sizes Recommended

Height	2650mm
Width	1250mm per rail
Weight	Configuration dependent

Frame Dimensions

Height	55mm
Depth	107mm

Min - Max Energy Performance

U-Value	1.4 - 2.8
SHGC	0.18 - 0.70
TVW	0.30 - 0.74

View our full list of WER's rating at conceptaluminium.com.au

Glazing Capacity

Fixed Windows	24-32mm
Awning Sashes	24-30mm
Hinged / Sliding Panels	24-26mm


Maximum Performance

Serviceability (+Pa)	800
Ultimate Pressure (+Pa)	2000
Water Penetration (Pa)	200
Acoustic Rating (RW)	30 - 36
Exposure Condition	N4




conceptaluminium.com.au
17 Broadfield Rd, Broadmeadows VIC
ABN: 97007214897
9357 2888
October 2025

Configurations

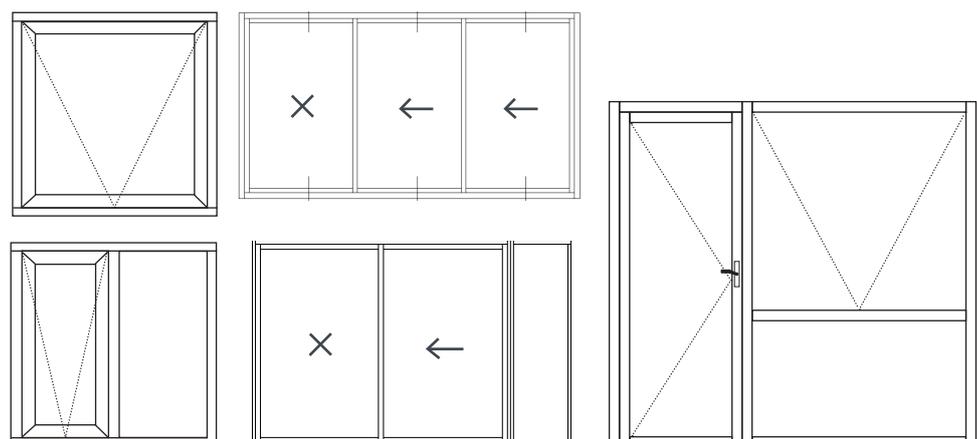


AluBREAK-COMM 16055CG Frame.




The 16055 Off-Set Glazed Frame is a bold, thermally broken system engineered with low polyamide thermal breaks to deliver outstanding energy efficiency. As the most robust frame in the AluBREAK Range, it is designed to perform in high-demand projects and can be configured to create a Fixed or Awning Window, Stacker Door, and Open-in or Open-Out Hinge Door, making it ideal for designs that require strength and superior performance.



AluBREAK-COMM Fixed Panel

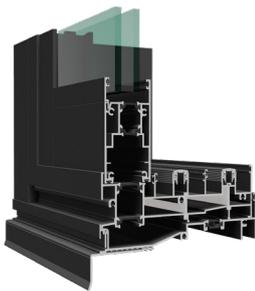

AluBREAK-COMM Stacker Door

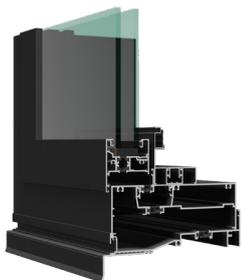

AluBREAK-COMM Awning Window

Features & Benefits

- Its large, heavy-duty construction allows for expansive openings that meet the requirements of size demanding designs and maximising natural light
- Optional fly doors available for added security and protection
- Frame adapters can be used to suit residential projects, enabling seamless integration across different build types
- Uses a dual seal overlapping sash creating superior airtightness

Maximum Sizes Recommended

Height	2800mm
Width	1250mm per rail
Weight	Configuration dependent

Min - Max Energy Performance

U-Value	2.5 - 3.3
SHGC	0.17 - 0.57
TVW	0.23 - 0.59

View our full list of WER's rating at conceptaluminium.com.au

Frame Dimensions

Height	55mm
Depth	160mm

Glazing Capacity

Fixed Windows	24-32mm
Awning Sashes	24-30mm
Hinged / Sliding Panels	24-26mm

Maximum Performance

Serviceability (+Pa)	800
Ultimate Pressure (+Pa)	2000
Water Penetration (Pa)	300
Exposure Condition	N4



conceptaluminium.com.au
17 Broadfield Rd, Broadmeadows VIC
ABN: 97007214897
9357 2888
October 2025

Configurations

