
10055-DG Centre Glazed Inline Sash Frame.

The AluCOMM Inline Sash, paired with our 10055-DG Centre Glazed Framing System, allows the sash to close flush with the frame, creating a clean and minimal finish. The system features a dedicated head, transom and sill for quick installation and superior water performance. Designed to meet the glazing requirements outlined in AS 4666, the 10055-DG features a 38mm glazing pocket, with an optional 50mm pocket, accommodating double glazed units up to 32mm thick. Additionally, captive glazing wedges can be used to support DGU thicknesses from 26mm to 32mm for efficient installation. Compatible with a wide range of operable AluCOMM window and door systems, it is suited to healthcare facilities, shopfronts and high-end residential projects where acoustic, thermal and structural performance are key.

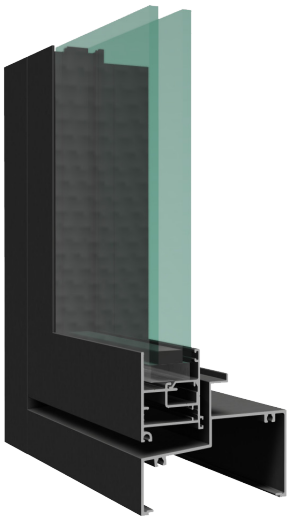

Features & Benefits

- The inline sash closes flush with the frame to create a clean, streamlined appearance and enhance the overall architectural finish
- Integrates seamlessly with the 10055-DG Centre Glazed Framing System, providing a streamlined solution with a clean flush finish
- Dedicated framing profiles simplify installation and provide a straightforward installation process
- The Inline sash combines with Hinge Doors and Awning Sashes, allowing greater flexibility when designing window and door configurations
- A wide range of sub framing options provides greater flexibility to suit different project requirements and installation conditions

Maximum Sizes Recommended

Inline Sash (W)	1198
Inline Sash (H)	2000

Acoustic Performance (RW)

RW	32 - 41

Min - Max Energy Performance

Option 1 U-Value	4.7
Option 1 SHGC	0.51
Option 1 TVW	0.5

CPT Codes: CPT-079
View our full list of WER's rating at conceptaluminium.com.au

Frame & Sash Dimensions

Option 1	101.6mm x 55mm - SG
Option 2	101.6mm x 55mm - DG
Option 3	101.6mm x 30mm - SG/DG ***narrow frame can be used as Jamb only
Sash	53mm x 42mm

Glazing Capacity

Double Glazing	26mm - 30mm

Maximum Performance

Option 1 Serviceability (+Pa)	600
Option 1 Ultimate Pressure (+Pa)	3000
Option 1 Water Penetration (Pa)	200
Option 2 Serviceability (+Pa)	600
Option 2 Ultimate Pressure (+Pa)	3000
Option 2 Water Penetration (Pa)	200
Water Penetration (Pa) Inline Sash	250

conceptaluminium.com.au
17 Broadfield Rd, Broadmeadows VIC
ABN: 97007214897
9357 2888
July 2026