



AluBREAK-RES




Fixed / Awning Window.

The Thermally Broken Awning/Fixed Window combines our 50mm residential frame with low polyamide thermal breaks to deliver exceptional energy performance. Engineered for all residential applications, it enhances temperature regulation and significantly boosts thermal efficiency, helping your home stay comfortable year-round. Refined and performance-driven, it's designed to be a standout feature in your next project.

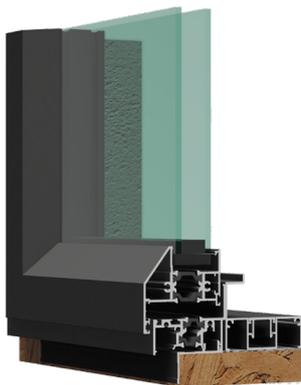

AluBREAK-RES Awning Window

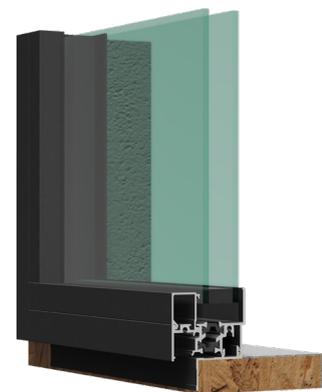

AluBREAK-RES Fixed Window

Features & Benefits

- Hook awning design allows for smooth operation
- Inline reveal and offset reveal options are available for installation flexibility
- Captive wedge glazing options for both sash and fixed panels ensure a secure glass fit and enhanced weather performance
- Uses a thermal support bar for sill support
- Can integrate a fly screen for extra security and protection
- Uses a dual seal overlapping sash creating superior airtightness

Maximum Sizes Recommended

Height	2500mm
Width	2200mm
Sash Weight	30kg

Frame Dimensions

Height	20mm
Depth	50mm

Min - Max Energy Performance

U-Value	1.4 - 2.9
SHGC	0.17 - 0.56
TVW	0.29 - 0.59

View our full list of WER's rating at conceptaluminium.com.au

Glazing Capacity

Awning Windows	20mm - 26mm
Fixed Sashes	20mm - 26mm

Maximum Performance

Serviceability (+Pa)	800
Ultimate Pressure (+Pa)	1400
Water Penetration (Pa)	150
Exposure Condition	N2



conceptaluminium.com.au
17 Broadfield Rd, Broadmeadows VIC
ABN: 97007214897
9357 2888
October 2025

Configurations

