
10350 Flush Glazed Frame.

The 10350 Flush Glazed Framing System offers a full-glass façade with minimally exposed aluminium through the use of integrated blind mullions, creating clean sight-lines with minimal visible framing from the outside. It is a popular choice for factories, warehouses, and architectural commercial projects. As a standalone system in the AluCOMM range, it can accommodate both single and double glazing configurations to suit a variety of commercial applications.

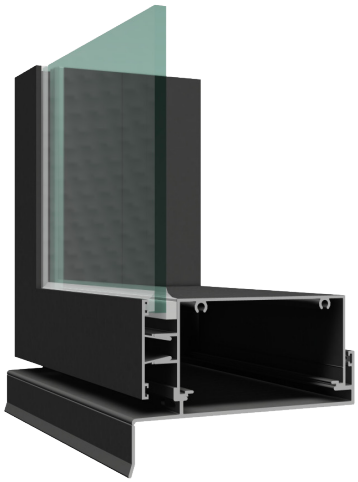

Features & Benefits

- Split mullions create the appearance of a continuous glass façade with clean, uninterrupted sight-lines
- Sub sills available to simplify installation and improve water management
- Externally glazed system for efficient on-site glazing and maintenance
- Structurally glazed design delivers a sleek, contemporary architectural aesthetic
- Uses a Mortice Lock with optional Flush Pull Handle or D Pull Handle that can be colour coded
- Compatible with Hinge Doors and Awning Sashes for flexible design integration

Maximum Sizes Recommended

Flat Sash On-Stays (W)	N/A
Flat Sash On-Stays (H)	N/A
Hinged Open Out Door (W)	1012
Hinged Open Out Door (H)	2315

Min - Max Energy Performance

U-Value (SG)	4.4 - 6.2
SHGC (SG)	0.44 - 0.76
TVW (SG)	0.36 - 0.80
U-Value (DG)	2.6 - 3.7
SHGC (DG)	0.19 - 0.71
TVW (DG)	0.29 - 0.74

CPT Codes: CPT-055, CPT-056
View our full list of WER's rating at conceptaluminium.com.au

Frame Dimensions

Option 1	103.6mm x 50mm - SG
Option 2	103.6mm x 50mm - DG


Glazing Capacity

Single Glazing	4mm - 12.38mm
Double Glazing	26mm

Maximum Performance

Serviceability (+Pa)	1500
Ultimate Pressure (+Pa)	2700
Water Penetration (Pa)	450
Water (Pa) Hinged Open Out Door	N/A
Water (Pa) Flat Sash Hook	N/A

Configuration Examples

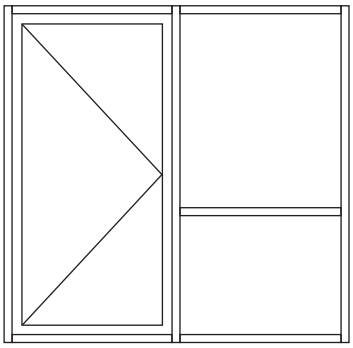

conceptaluminium.com.au
17 Broadfield Rd, Broadmeadows VIC
ABN: 97007214897
9357 2888

July 2026