15055-DG Front Glazed Inline Sash Frame

The AluCOMM Inline Sash, paired with our 15055-DG Front Glazed Framing System, allows the sash to close flush with the frame, creating a clean and minimal finish. The system features a dedicated head, transom and sill for quick installation and superior water performance. The 15055-DG Front Glazed System creates a high performing seamless glass façade using structurally glazed split mullions that minimise visible aluminum and delivers a clean, contemporary external appearance. With the ability to install DGU's up to 32mm it is designed for projects that require superior performance that is necessary for commercial buildings.



Features & Benefits

- The inline sash closes flush with the frame to create a clean, streamlined appearance and enhance the overall architectural finish
- Integrates seamlessly with the 10055-DG Front Glazed Framing System, providing a streamlined solution with a clean flush finish
- Dedicated framing profiles simplify installation and provide a straightforward installation process
- The Inline sash combines with Hinge Doors and Awning Sashes, allowing greater flexibility when designing window and door configurations
- A wide range of sub framing options provides greater flexibility to suit different project requirements and installation condition

Maximum Sizes Recommended

Inline Sash (W)	1042
Inline Sash (H)	2276

Min - Max Energy Performance

U-Value (DG)	N/A
SHGC (DG)	N/A
TVW (DG)	N/A

CPT Codes: CPT-078 (Publishing Pending)
View our full list of WER's rating at conceptaluminium.com.au

Frame Dimensions

Option 1	N/A
Option 2	150mm x 55mm - DG


Glazing Capacity

Single Glazing	N/A
Double Glazing	22mm - 32mm

Maximum Performance

Serviceability (+Pa)	2000
Ultimate Pressure (+Pa)	4500
Water Penetration (Pa)	600

Configuration Examples

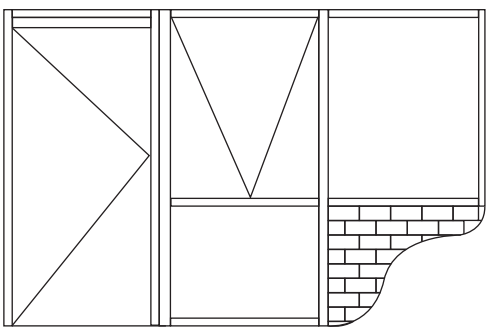

conceptaluminium.com.au
17 Broadfield Rd, Broadmeadows VIC
ABN: 97007214897
9357 2888

July 2026